



FA-LCUP-SD01-0001-BU

FIBER OPTIC ADAPTER

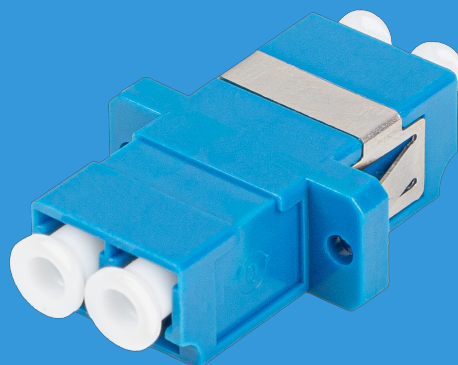

PRODUCT FEATURES:

- Low attenuation of connectors
- Repeatability of transmission parameters
- Snap-fit (push-pull) mounting
- Flange (flange) for M2 screws

PRODUCT SPECIFICATION:

Connectors	LC
Polishing standard	UPC
Fiber Type	Single-Mode
Fiber diameter	9/125
Cable Construction	Duplex
Ferrule diameter	1,25 mm
Insertion loss	0,15 dB
Environment temperature	from -40 up to 85 °C
Colour	Blue
Cap	White