



Cable ID: PCU5-10CC-0050-S

Date / Time: 07/04/2019 10:57:44 AM

Headroom 21.2 dB (NEXT 36-45)

Test Limit: TIA Cat 5e Channel

Cable Type: Cat 5e U/UTP

NVP: 69.0%

Software Version: V6.2 Build 1

Limits Version: V7.2

Calibration Start Date:

Main (Module): 12/03/2018

Remote (Module): 12/03/2018

Test Summary: PASS

Model: DSX-8000



Main S/N: 1820302

Remote S/N: 1824298

Main Adapter: DSX-CHA804

Remote Adapter: DSX-CHA804

Length (ft), Limit 328	[Pair 36]	1
Prop. Delay (ns), Limit 555	[Pair 12]	3
Delay Skew (ns), Limit 50	[Pair 12]	1
Resistance (ohms)	[Pair 12]	0.35
Insertion Loss Margin (dB)	[Pair 36]	23.8
Frequency (MHz)	[Pair 36]	100.0
Limit (dB)	[Pair 36]	24.0

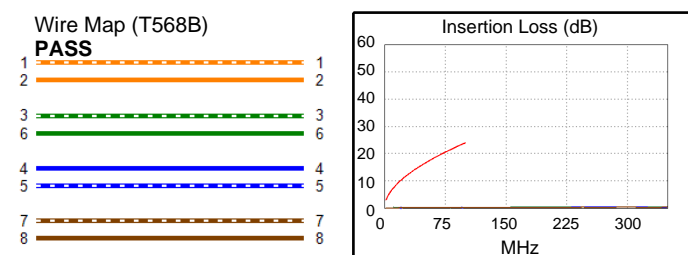

	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-45	36-45	36-45
NEXT (dB)	21.2	22.2	36.0	33.5
Freq. (MHz)	1.6	4.8	69.3	42.5
Limit (dB)	59.9	52.3	32.8	36.4
Worst Pair	36	36	36	36
PS NEXT (dB)	23.1	24.6	38.7	36.2
Freq. (MHz)	1.6	4.8	69.3	42.5
Limit (dB)	56.9	49.3	29.8	33.4

	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	45-36	36-45	45-36
ACR-F (dB)	31.1	31.1	31.1	31.1
Freq. (MHz)	100.0	100.0	100.0	100.0
Limit (dB)	17.4	17.4	17.4	17.4
Worst Pair	36	36	36	36
PS ACR-F (dB)	28.9	29.3	32.1	32.0
Freq. (MHz)	1.0	1.1	100.0	100.0
Limit (dB)	54.4	53.4	14.4	14.4

	Worst Case Margin		Worst Case Value	
N/A	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-45	36-45	36-45
ACR-N (dB)	24.2	26.0	55.5	48.5
Freq. (MHz)	1.6	1.8	69.3	42.5
Limit (dB)	56.9	56.4	13.2	21.3
Worst Pair	36	36	36	36
PS ACR-N (dB)	26.1	27.7	58.2	51.2
Freq. (MHz)	1.6	1.8	69.3	42.5
Limit (dB)	53.9	53.4	10.2	18.3

	Worst Case Margin		Worst Case Value	
N/A	MAIN	SR	MAIN	SR
Worst Pair	78	36	12	36
RL (dB)	18.7	20.6	20.1	20.9
Freq. (MHz)	1.0	62.3	68.8	73.0
Limit (dB)	17.0	12.1	11.6	11.4

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive

